


โพลเซอร์เพชรเจาะคอนกรีต (ใช้น้ำ) “ยูนิกะ”

DC Type-diamond core drill



- Drill reinforced concrete (up to 10mm – reinforced) with no impact, low noise, and low load.
- Feature easy – to – use center pin system enabling simple center positioning.

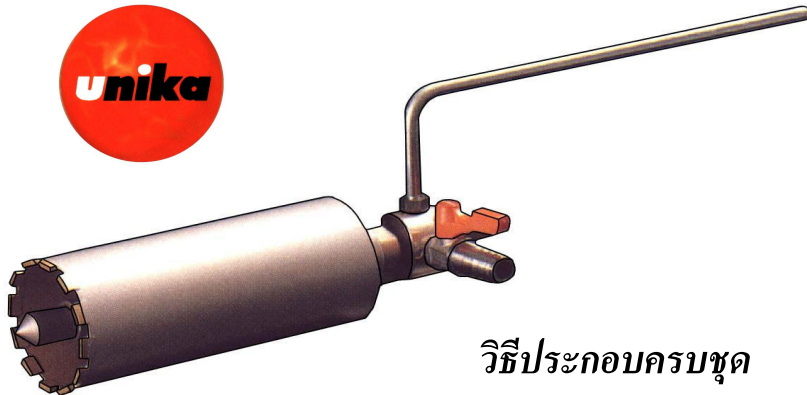

วิธีประกอบครบชุด

Concrete	Block/brick	Mortar	Slate
ALC	Japanese wall	Stone	Roof tile
All types of exterior panels	Resin-based artificial marble	Ceramic tile	Porcelain tile

Rotation

Electric drill

Percussion drill (rotating mode only)

● Instructions

- Align center pin with the position of hole. Holding the drill tightly, switch on the motor.
- Remove center pin once cutter has penetrated approx. 5mm.
- Continue working lightly holding the motor.

Suitable electric drills

- ◇ Power consumption / 500W minimum
- ◇ Speed / 1,000 to 1,400 rpm.

Precautions on use

- ◇ Diamond burns and carbonizes at high temperatures. Water must be provided during drilling operations to cool the diamond tip.
- ◇ The center pin must be removed once the drilling location has been positioned.
- ◇ Where possible the cutting of steel reinforcements should be avoided as this affects building strength.

ราคาเฉพาะใบ


รหัสสินค้า	ขนาด	อันละ	A
UN6030	30 mm		ยาว
UN6032	32 mm		170 mm
UN6035	35 mm		เจาะลึก
UN6038	38 mm		150 mm
UN6050	50 mm		ยาว
UN6060	60 mm		
UN6065	65 mm		
UN6070	70 mm		
UN6075	75 mm		
UN6080	80 mm		
UN6090	90 mm		เจาะลึก
UN6091	100 mm		130 mm
UN6092	110 mm		
UN6093	120 mm		

เฉพาะข้อต่อศูนย์กลาง CENTER PIN




รหัสสินค้า	No.	สำหรับขนาด	อันละ
UN6100	# 0 (207mm)	30 – 38 mm	
UN6101	# 1 (187mm)	40 – 120 mm	

เฉพาะข้อต่อหัวกลม

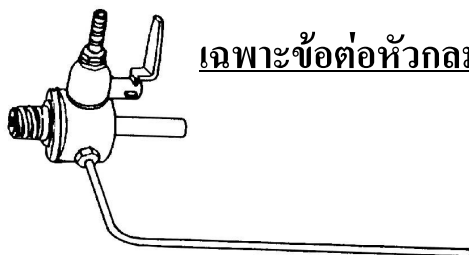

รหัสสินค้า	อันละ
UN6102	

เฉพาะข้อต่อหัว SDS

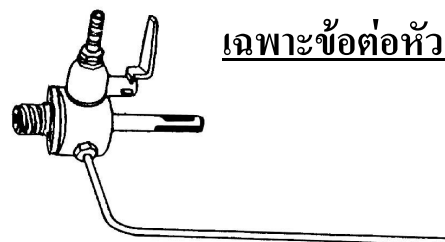

รหัสสินค้า	อันละ
UN6103	

www.boriphat.com

ราคานี้ยังไม่รวมภาษีมูลค่าเพิ่ม

ราคาอาจเปลี่ยนแปลงได้โดยมิต้องแจ้งล่วงหน้า